


## DATA SHEET

# energeto 8000ED

- Offset design
- 85 mm construction depth
- 6-chamber profile with 3 seals

U<sub>w</sub>-Value  
≥ 0.72

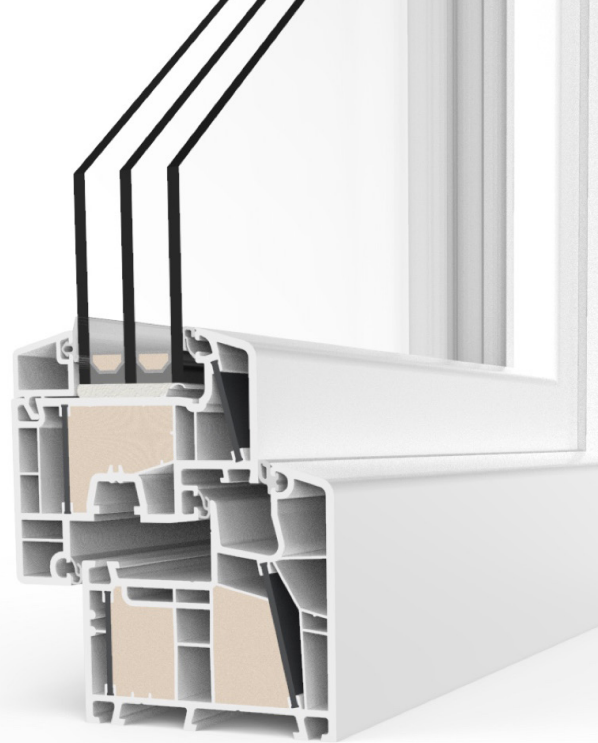

### Energy saving through new windows

U <sub>w</sub> value (old)	3.50 W/(m <sup>2</sup> K)
U <sub>w</sub> value (new)	0.72 W/(m <sup>2</sup> K)
Window area	30 m <sup>2</sup>
Annual fuel oil savings	1109 litres
Annual carbon dioxide reduction	2,996 kg


### Explanation

Heating degree days	4,050
Conversion factor kilogram into litres of heating oil	1.19
Conversion of calorific value Wh/kg	11,800
Heating efficiency	0.75

### SAFETY EQUIPMENT / FITTING

#### BASIS:

- Bonding technology
- Fitting with 3 locking plates
- 3-dimensionally adjustable
- Anti mishandling device
- Sash lifter
- Max. sash weight 90 kg



#### OPTIONAL:

- ActivPilot Comfort PAD (parallel stop fitting)
- Safety levels: RC1, RC2, according to EN 1627-1630
- SELECT fitting (concealed corner and shear bearings)
- "Tilt before Turn"
- High Control (magnetic contact for electronic monitoring)

### COLOURS

- White
- Decor according to current price list according to colour range uPVC

### SOUND INSULATION

Window R<sub>w</sub>P up to 41 dB

### GLASS THICKNESS

To 51 mm

### SEALS

- Centre sealing system
- 3 sealing levels
- Possible colours:
  - Papyrus white or black for decor



## SYSTEM VALUES

- Air permeability: Class 3 (according to EN 12207)
- Driving rain-proof: Class 4A (according to EN 12208)
- Water tightness against driving rain:  
Class B3 (according to EN 12210)

### Please note:

The classes given here are minimum classes. For higher requirements please consult us.

## THERMAL INSULATION

- Reference size 1230 x 1480 mm
- $U_f = 0.95 \text{ W/(m}^2\text{K)}$
- Minimum requirement according to GEG2020  $U_w = 1.3 \text{ W/(m}^2\text{K)}$
- PHT = suitable for passive houses

$U_g$ Glass (W/m <sup>2</sup> K) according to EN 673	$U_w$ window (W/m <sup>2</sup> K) Type of edge spacer		
	Aluminium	KSH / KSD	Swisspacer Ultimate
<b>Double glazing</b>	Psi = 0.066 (W/mK)	Psi = 0.041 (W/mK)	Psi = 0.032 (W/mK)
1.1	1.21	1.15	1.13
1.0	1.15	1.08	1.06
<b>Triple glazing</b>	Psi = 0.064 (W/mK)	Psi = 0.039 (W/mK)	Psi = 0.030 (W/mK)
0.8	1.01	0.94	0.92
0.7	0.95	0.88	0.85
0.6	0.87	0.81	0.79 (PHT)
0.5	0.80	0.74 (PHT)	0.72 (PHT)

$U_w$  values < 1.0 W/(m<sup>2</sup>K) are shown with two decimal places in accordance with EN ISO 10077

$U_w$  values > 1.0 W/(m<sup>2</sup>K) are shown with one decimal place according to EN ISO 10077, here with two decimal places for information purposes


The PSI values given are taken from the data sheets of the "Warm Edge" working group

## SOUND INSULATION


Reference size 1230 x 1480 mm  
(Elements with test certificate)

$R_w \triangleq R_{wp}$ = test value window	$R_{wr}$ = calculated value window	$R_{wp}$ = test value glass	Test certificate no.
33 dB	31 dB	29 dB	175 42480/2
38 dB	36 dB	35 dB	175 42480/2
41 dB	39 dB	42 dB	175 42480/2

For Germany, the following applies according to DIN 4109:1989-11:  
 $R_w$  corresponds to  $R_{wp}$ ;  $R_{wr} = R_{wp} - 2\text{dB}$

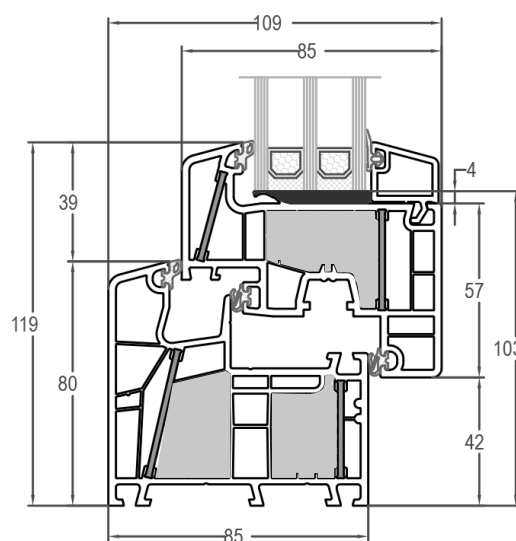

ENERGETO 8000ED FRAME WITH SASH

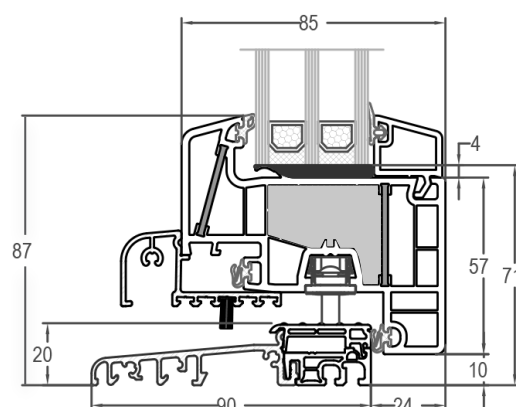

ENERGETO 8000ED FRENCH DOORS WITH FLAT THRESHOLD

## POSSIBLE GLASS STRIPS:

STANDARD

